



MARCUS

Marcus Transformer LTD
 Phone: 1-800-267-7376
 Fax: 1-866-205-7526
 Email: Info@marcustransformer.com

TECHNICAL DATA MODEL:MS 7.5A2-CC [1-PHASE ISOLATING]

DESCRIPTION	
Type	DRY TYPE DISTRIBUTION (ANN)
KVA	7.5
Primary (Volts)	600
Secondary (Volts)	120 / 240
Phase	1
Enclosure	Core and Coil
Impedance (%z)	4.9
Insulation Class	220°C
Temperature Rise	150°C
Frequency	60Hz
Weight (LBS/KG)	78 / 35
Polarity	Additive
BIL.	10KV


Primary connectors per phase : #14-2
Secondary connectors per phase: #14-2

PERFORMANCE	
No load loss	39W
Total loss	450W
Noise level	45dB

Efficiency = 94.1%

FEATURES:

- Ground lug provided
- Leads brought-up and solidly positioned into separate terminal boards
- CSA certified / UR listed
- Copper windings

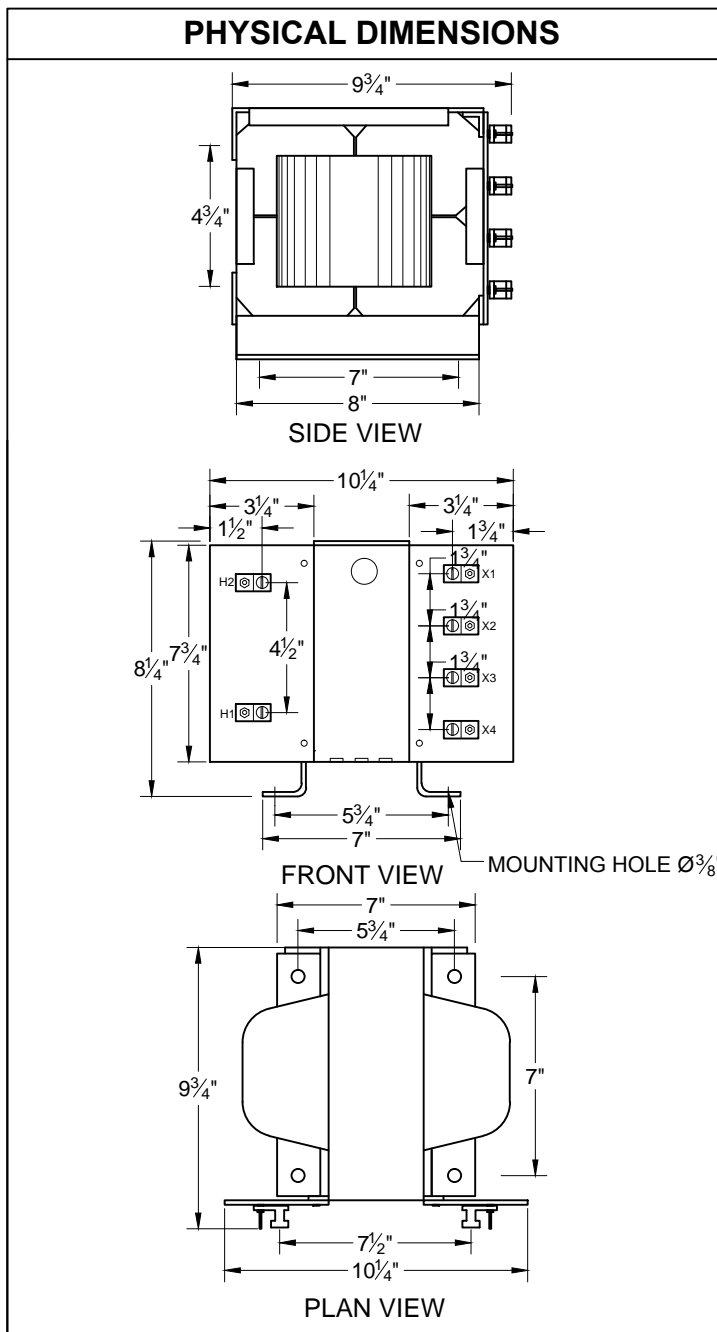

Customer / PO	
Project	
Engineer	
Contractor	
Revision Date	

COMMENTS